



Ref. Certif. No.

JPTUV-094611

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE CERTIFICATS D ESSAIS DES EQUIPEMENTS ELECTRIQUES (IECEE) METHODE OC

### CB TEST CERTIFICATE

### CERTIFICAT D'ESSAI OC

Product  
Produit

Li-ion Cell

Name and address of the applicant  
Nom et adresse du demandeur

WU XI MINGYANG BATTERY CO., LTD.  
Caiwan Village  
Ganlu, Ehu Town, Xishan District, Wuxi City, Jiangsu Province  
214000, P. R. China

Name and address of the manufacturer  
Nom et adresse du fabricant

WU XI MINGYANG BATTERY CO., LTD.  
Caiwan Village  
Ganlu, Ehu Town, Xishan District, Wuxi City, Jiangsu Province  
214000, P. R. China

Name and address of the factory  
Nom et adresse de l'usine

WU XI MINGYANG BATTERY CO., LTD.  
Caiwan Village  
Ganlu, Ehu Town, Xishan District, Wuxi City, Jiangsu Province  
214000, P. R. China

Ratings and principal characteristics  
Valeurs nominales et caractéristiques principales

See test report

Trademark (if any)  
Marque de fabrique (si elle existe)

MINGYANG

Type of Manufacturer's Testing Laboratories used  
Type de programme du laboratoire d'essais constructeur

N/A

Model / Type Ref.  
Ref. de type

INR18650H 2000mAh, INR18650H 2200mAh

Additional information (if necessary may also be reported on page 2)  
Les informations complémentaires (si nécessaire, peuvent être indiqués sur la 2<sup>ème</sup> page)

For model differences, refer to test report

A sample of the product was tested and found to be in conformity with  
Un échantillon de ce produit a été essayé et a été considéré conforme à la

IEC 62133-2:2017  
See Test Report for National Differences

As shown in the Test Report Ref. No. which forms part of this Certificate  
Comme indiqué dans le Rapport d'essais numéro de référence qui constitue partie de ce Certificat

50217988 001

This CB Test Certificate is issued by the National Certification Body  
Ce Certificat d'essai OC est établi par l'Organisme National de Certification



TÜVRheinland®

TÜV Rheinland Japan Ltd.  
Global Technology Assessment Center  
4-25-2 Kita-Yamata, Tsuzuki-ku  
Yokohama 224-0021 Japan  
Phone + 81 45 914-3888  
Fax + 81 45 914-3354  
Mail: info@jpn.tuv.com  
Web: www.tuv.com

Date: 25.02.2019

Signature:

Paddy Qiu



Test Report issued under the responsibility of:



**TEST REPORT**  
**IEC 62133-2**  
**Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications –**  
**Part 2: Lithium systems**

**Report Number**..... : 50217988 001  
**Date of issue**..... : 2019-02-25  
**Total number of pages** ..... : 24 pages

**Name of Testing Laboratory preparing the Report** ..... : Shenzhen ZRLK Testing Technology Co., Ltd.

**Applicant's name** ..... : WU XI MINGYANG BATTERY CO., LTD.  
**Address**..... : Caiwan Village, Ganlu, Ehu Town, Xishan District, Wuxi City, Jiangsu Province 214000, P. R. China

**Test specification:**  
**Standard** ..... : IEC 62133-2:2017  
**Test procedure** ..... : CB Scheme  
**Non-standard test method** ..... : N/A

**Test Report Form No.** ..... : IEC62133\_2A  
**Test Report Form(s) Originator** .... : DEKRA  
**Master TRF** ..... : Dated 2017-08-10

**Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**


**General disclaimer:**  
The test results presented in this report relate only to the object tested.  
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description..... :	Li-ion Cell	
Trade Mark..... :	MINGYANG	
Manufacturer .....	Same as applicant	
Model/Type reference .....	INR18650H 2000mAh, INR18650H 2200mAh	
Ratings .....	See page 6	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	Shenzhen ZRLK Testing Technology Co., Ltd.
Testing location/ address..... :	6F, Fuxinfa Industrial Park, Liuxiandong, Xili Street, Nanshan District, Shenzhen 518055, Guangdong, China	
Tested by (name, function, signature)..... :	Renee Xie	<i>Renee Xie</i>
Approved by (name, function, signature).... :	Ailis Ma	<i>Ailis Ma</i>
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	
Testing location/ address..... :		
Tested by (name, function, signature)..... :		
Approved by (name, function, signature).... :		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	
Testing location/ address..... :		
Tested by (name + signature) .....		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature).... :		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	
Testing location/ address..... :		
Tested by (name, function, signature)..... :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature).... :		
Supervised by (name, function, signature) :		


<b>List of Attachments (including a total number of pages in each attachment):</b> Attachment 1: Photo documentation (2 pages).	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b> cl.5.6.2 Design recommendation; cl.7.1 Charging procedures for test purposes (for cells); cl.7.2.1 Continuous charging at constant voltage (cells); cl.7.3.1 External short-circuit (cells); cl.7.3.3 Free fall (cells); cl.7.3.4 Thermal abuse (cells); cl.7.3.5 Crush (cells); cl.7.3.7 Forced discharge (cells); cl.7.3.9 Design evaluation – Forced internal short-circuit (cells). Tests are made with the number of cells specified in IEC 62133-2: 2017 Table 1.	<b>Testing location:</b> <b>Shenzhen ZRLK Testing Technology Co., Ltd.</b> 6F, Fuxinfa Industrial Park, Liuxiandong, Xili Street, Nanshan District, Shenzhen 518055, Guangdong, China
<b>Summary of compliance with National Differences (List of countries addressed):</b> DK, SE, UK DK=Denmark, SE=Sweden, UK=United Kingdom	
<input checked="" type="checkbox"/> <b>The product fulfils the requirements of <u>EN 62133-2: 2017</u></b>	

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

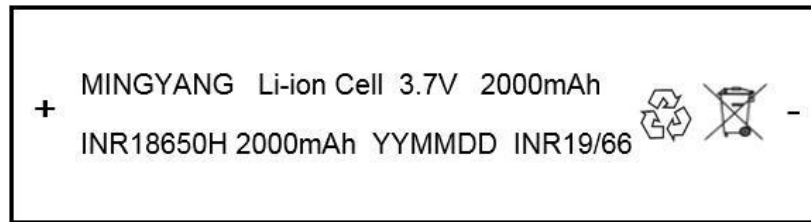

**Model: INR18650H 2000mAh**

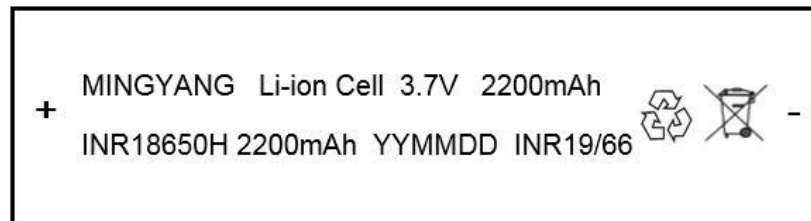

**Model: INR18650H 2200mAh**

Remark: YYMMDD represents the date of manufacture.

<b>Test item particulars.....:</b>	
<b>Classification of installation and use.....:</b>	N/A
<b>Supply Connection .....</b>	DC terminal
<b>Recommend charging method declared by the manufacturer .....</b>	Charging the cell with 1C constant current and 4.2V constant voltage until the current reduces to 0.02C at ambient 20°C±5°C.
<b>Discharge current (0,2 It A) .....</b>	See page 6
<b>Specified final voltage.....:</b>	2.5V
<b>Upper limit charging voltage per cell.....:</b>	4.25V
<b>Maximum charging current .....</b>	See page 6
<b>Charging temperature upper limit .....</b>	50°C for INR18650H 2000mAh; 45°C for INR18650H 2200mAh
<b>Charging temperature lower limit.....:</b>	-10°C for INR18650H 2000mAh; 0°C for INR18650H 2200mAh
<b>Polymer cell electrolyte type.....:</b>	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
<b>Testing.....:</b>	
<b>Date of receipt of test item .....</b>	Jan. 07, 2019
<b>Date (s) of performance of tests .....</b>	Jan. 07, 2019 – Jan. 30, 2019
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC60080-2:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies) .....</b>	Same as applicant

**General product information and other remarks:**

The cell consists of the positive electrode plate, negative electrode plate, separator, electrolyte and case. The positive and negative electrode plates are housed in the case in the state being separated by the separator.

The cells have the same dimensions, chemistry, voltage, but different capacities.


The main features of the cell are shown as below (clause 7.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Final Voltage
INR18650H 2000mAh	2000mAh	3.7V	2000mA	2000mA	4000mA	25000mA	4.25V	2.5V
INR18650H 2200mAh	2200mAh	3.7V	2200mA	2200mA	4000mA	11000mA	4.25V	2.5V

The main features of the cell in the battery are shown as below (clause 7.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
INR18650H 2000mAh	4.25V	100mA	-10°C	50°C
INR18650H 2200mAh	4.25V	110mA	0°C	45°C

Construction

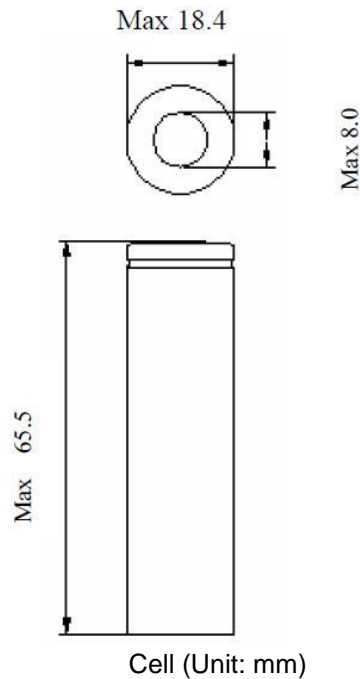

Circuit diagram:  
None, cell only

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>PARAMETER MEASUREMENT TOLERANCES</b>		P
	Parameter measurement tolerances		P
<b>5</b>	<b>GENERAL SAFETY CONSIDERATIONS</b>		P
<b>5.1</b>	<b>General</b>		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
<b>5.2</b>	<b>Insulation and wiring</b>		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal surface exists.	N/A
	Insulation resistance (MΩ) ..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
<b>5.3</b>	<b>Venting</b>		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the top of cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
<b>5.4</b>	<b>Temperature, voltage and current management</b>	Cell only.	N/A
	Batteries are designed such that abnormal temperature rise conditions are prevented		N/A
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer		N/A
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified		N/A
<b>5.5</b>	<b>Terminal contacts</b>		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	Complied.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short-circuit		P
<b>5.6</b>	<b>Assembly of cells into batteries</b>	Cell only.	N/A
5.6.1	General		N/A
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		N/A
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		N/A
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		N/A
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		N/A
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage		N/A
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		N/A
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse		N/A
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product		N/A
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer	To be evaluated in final system.	N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
<b>5.7</b>	<b>Quality plan</b>	Complied.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	ISO 9001: 2015 certificate provided.	P
<b>5.8</b>	<b>Battery safety components</b>		N/A
	According annex F	See TABLE: Critical components information	N/A

<b>6</b>	<b>TYPE TEST AND SAMPLE SIZE</b>		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1	Not coin cells	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection		N/A
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test		N/A

<b>7</b>	<b>SPECIFIC REQUIREMENTS AND TESTS</b>		P
<b>7.1</b>	<b>Charging procedure for test purposes</b>		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ , using the method declared by the manufacturer	See page 5.	P
	Prior to charging, the battery have been discharged at $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ at a constant current of 0,2 It A down to a specified final voltage	See page 5.	P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method	For INR18650H 2000mAh, charge temperature specified by manufacturer: -10-50°C; 55°C used for upper limit test temperature; -15°C used for lower limit test temperature; For INR18650H 2200mAh, charge temperature specified by manufacturer: 0-45°C; 45°C used for upper limit test temperature; -5°C used for lower limit test temperature.	P
<b>7.2</b>	<b>Intended use</b>		P
7.2.1	Continuous charging at constant voltage (cells)	Tested complied.	P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7 days with 1C.	P
	Results: No fire. No explosion. No leakage..... :	(See appended table 7.2.1)	P
7.2.2	Case stress at high ambient temperature (battery)	Cell only.	N/A
	Oven temperature (°C)..... :		—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells		N/A
<b>7.3</b>	<b>Reasonably foreseeable misuse</b>		P
7.3.1	External short-circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See appended table 7.3.1)	P
7.3.2	External short-circuit (battery)	Cell only.	N/A
	The batteries were tested until one of the following occurred:		N/A
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor		N/A
	Results: No fire. No explosion..... :	(See appended table 7.3.2)	N/A
7.3.3	Free fall	Tested complied.	P
	Results: No fire. No explosion	No fire. No explosion	P
7.3.4	Thermal abuse (cells)	Tested complied.	P
	Oven temperature (°C)..... :	130°C	—
	Results: No fire. No explosion	No fire. No explosion	P
7.3.5	Crush (cells)	Tested complied.	P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion..... :	(See appended table 7.3.5)	P
7.3.6	Over-charging of battery	Cell only.	N/A
	The supply voltage which is:		N/A
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N/A
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		N/A
	Test was continued until the temperature of the outer casing:		N/A
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		N/A
	Results: No fire. No explosion..... :	(See appended table 7.3.6)	N/A
7.3.7	Forced discharge (cells)	Tested complied.	P
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No fire. No explosion..... :	(See appended table 7.3.7)	P
7.3.8	Mechanical tests (batteries)	Cell only.	N/A
7.3.8.1	Vibration		N/A
	Results: No fire, no explosion, no rupture, no leakage or venting. .... :	(See appended table 7.3.8.1)	N/A
7.3.8.2	Mechanical shock		N/A
	Results: No leakage, no venting, no rupture, no explosion and no fire ..... :	(See appended table 7.3.8.2)	N/A
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	P
	The cells complied with national requirement for ..... :	France, Japan, Republic of Korea and Switzerland	—
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	800 N for cylindrical cells.	P
	Results: No fire ..... :	(See appended table 7.3.9)	P

<b>8</b>	<b>INFORMATION FOR SAFETY</b>		P
<b>8.1</b>	<b>General</b>		P
	Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	P
	Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards		N/A
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		P
<b>8.2</b>	<b>Small cell and battery safety information</b>		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
<b>9</b>	<b>MARKING</b>		P
<b>9.1</b>	<b>Cell marking</b>	See marking plate on page 4.	P
	Cells marked as specified in IEC 61960, except coin cells		P
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
<b>9.2</b>	<b>Battery marking</b>	Cell only.	N/A
	Batteries marked as specified in IEC 61960, except for coin batteries		N/A
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement		N/A
	Terminals have clear polarity marking on the external surface of the battery		N/A
	Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		N/A
<b>9.3</b>	<b>Caution for ingestion of small cells and batteries</b>	Not small cell.	N/A
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package		N/A
<b>9.4</b>	<b>Other information</b>		P
	Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	P

10	PACKAGING AND TRANSPORT		P
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N/A
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants		P

ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General		P
A.3.2	Upper limit charging voltage	4.25V.	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	For INR18650H 2000mAh, charge temperature declared by client is: -10-50°C; For INR18650H 2200mAh, charge temperature declared by client is: 0-45°C.	P
A.4.3	High temperature range	For INR18650H 2000mAh, charging high temperature declared by client is: 50°C, For INR18650H 2200mAh, charging high temperature declared by client is: 45°C.	P
A.4.3.1	General		P
A.4.3.2	Explanation of safety viewpoint		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		P
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range	For INR18650H 2000mAh, no documents provided by manufacturer explaining the upper limit exceed 45°C, 55°C applied for testing in this report for safety considerations.	P
A.4.4	Low temperature range	For INR18650H 2000mAh, charge lower temperature declared by client is: -10°C; For INR18650H 2200mAh, charge lower temperature declared by client is: 0°C	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range	For INR18650H 2000mAh, no documents provided by manufacturer explaining the lower limit exceed 10°C, -15°C applied for testing in this report for safety considerations; For INR18650H 2200mAh, no documents provided by manufacturer explaining the lower limit exceed 10°C, -5°C applied for testing in this report for safety considerations.	P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
<b>A.5</b>	<b>Sample preparation</b>		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.5.5	Insertion of nickel particle in cylindrical cell		P
A.5.5.1	Insertion of nickel particle in winding core		P
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		P
A.5.6	Insertion of nickel particle in prismatic cell		N/A
<b>A.6</b>	<b>Experimental procedure of the forced internal short-circuit test</b>		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P
<b>ANNEX B</b>	<b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>		N/A
<b>ANNEX C</b>	<b>RECOMMENDATIONS TO THE END-USERS</b>		N/A
<b>ANNEX D</b>	<b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>		N/A
<b>D.1</b>	<b>General</b>	Not coin cells.	N/A
<b>D.2</b>	<b>Method</b>		N/A
	A sample size of three coin cells is required for this measurement..... :	(See appended table D.2)	N/A
	Coin cells with an internal resistance of less than or equal to 3 $\Omega$ are subjected to the testing according to Clause 6 and Table 1		N/A
	Coin cells with an internal resistance greater than 3 $\Omega$ require no further testing		N/A
<b>ANNEX E</b>	<b>PACKAGING AND TRANSPORT</b>		N/A
<b>ANNEX F</b>	<b>COMPONENT STANDARDS REFERENCES</b>		N/A

TABLE: Critical components information					P
Object / part No.	Manufacturer / trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>
Cell	WU XI MINGYANG BATTERY CO., LTD.	INR18650H 2000mAh	Rated Voltage: 3.7Vd.c., Rated Capacity: 2000mAh	IEC 62133- 2: 2017	Tested with appliance
-Electrolyte	GUANGZHOU TINCI MATERIALS TECHNOLOGY CO.,LTD	TC-EMY06D	LiPF <sub>6</sub> , DMC, EMC, EC	--	--
-Separator	SHENZHEN BAOCHANG ELECTRONIC Co.,Ltd	S05	PE, 20µm×60.5mm×1700m m, Shutdown temperature: 135°C	--	--
-Positive electrode	CHANGZHOU BOJIE NEW ENERGY Co.,Ltd	SM003K	LiNi <sub>x</sub> Co <sub>y</sub> Mn <sub>1-x-y</sub> O <sub>2</sub> , Ni: Co: Mn=5: 2: 3	--	--
-Negative electrode	KAIJIN NEW ENERGY TECHNOLOGY CO.,LTD	AML400	Graphite	--	--
-Positive electrode tab	YIXING HUIYUAN ELECTRONIC TECHNOLOGY CO.,LTD	4mm*0.1mm	Aluminium	--	--
-Negative electrode tab	WUXI TOYON NEW MATERIALS CO.,LTD	4mm*0.08mm	Nickel	--	--
-Case	WUXI CITY JINYANG NEW TYPE POWER SUPPLY CO.,LTD	17.68mm*68.05mm	0.23mm	--	--
Cell	WU XI MINGYANG BATTERY CO., LTD.	INR18650H 2200mAh	Rated Voltage: 3.7Vd.c., Rated Capacity: 2200mAh	IEC 62133- 2: 2017	Tested with appliance
-Electrolyte	GUANGZHOU TINCI MATERIALS TECHNOLOGY CO.,LTD	TC-EMY06D	LiPF <sub>6</sub> , DMC, EMC, EC	--	--
-Separator	SHENZHEN BAOCHANG ELECTRONIC Co.,Ltd	S05	PE, 20µm×60.5mm×1700m m, Shutdown temperature: 135°C	--	--
-Positive electrode	CHANGZHOU BOJIE NEW ENERGY Co.,Ltd	SM003K	LiNi <sub>x</sub> Co <sub>y</sub> Mn <sub>1-x-y</sub> O <sub>2</sub> , Ni: Co: Mn=5: 2: 3	--	--
-Negative electrode	KAIJIN NEW ENERGY TECHNOLOGY CO.,LTD	AML400	Graphite	--	--
-Positive electrode tab	YIXING HUIYUAN ELECTRONIC TECHNOLOGY CO.,LTD	4mm*0.1mm	Aluminium	--	--
-Negative electrode tab	WUXI TOYON NEW MATERIALS CO.,LTD	4mm*0.08mm	Nickel	--	--

-Case	WUXI CITY JINYANG NEW TYPE POWER SUPPLY CO.,LTD	17.68mm*68. 05mm	0.23mm	--	--
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample no.	Recommended charging voltage Vc (Vdc)	Recommended charging current I <sub>rec</sub> (A)	OCV before test (Vdc)	Results	
INR18650H 2000mAh					
Cell #1	4.20	2.0	4.19	P	
Cell #2	4.20	2.0	4.19	P	
Cell #3	4.20	2.0	4.19	P	
Cell #4	4.20	2.0	4.19	P	
Cell #5	4.20	2.0	4.19	P	
INR18650H 2200mAh					
Cell #1	4.20	2.2	4.19	P	
Cell #2	4.20	2.2	4.20	P	
Cell #3	4.20	2.2	4.18	P	
Cell #4	4.20	2.2	4.19	P	
Cell #5	4.20	2.2	4.18	P	
<b>Supplementary information:</b>					
- No fire or explosion					
- No leakage					

7.3.1	TABLE: External short-circuit (cell)				P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT, °C	Results
INR18650H 2000mAh					
<b>Samples charged at charging temperature upper limit (55°C)</b>					
Cell 6#	56.4	4.19	80.0	111.4	P
Cell 7#	56.4	4.20	83.0	122.9	P
Cell 8#	56.4	4.19	85.0	108.8	P
Cell 9#	56.4	4.20	85.0	117.6	P
Cell 10#	56.4	4.19	86.0	101.7	P
<b>Samples charged at charging temperature lower limit (-15°C)</b>					
Cell 11#	56.4	4.10	80.0	99.2	P
Cell 12#	56.4	4.10	83.0	114.3	P
Cell 13#	56.4	4.10	85.0	112.9	P
Cell 14#	56.4	4.10	80.0	109.0	P
Cell 15#	56.4	4.10	89.0	117.3	P
INR18650H 2200mAh					
<b>Samples charged at charging temperature upper limit (45°C)</b>					
Cell 6#	56.1	4.19	84.0	114.9	P

Cell 7#	56.1	4.20	80.0	101.8	P
Cell 8#	56.1	4.20	83.0	112.3	P
Cell 9#	56.1	4.20	89.0	105.7	P
Cell 10#	56.1	4.19	90.0	124.9	P
<b>Samples charged at charging temperature lower limit (-5°C)</b>					
Cell 11#	56.1	4.14	84.0	120.3	P
Cell 12#	56.1	4.15	85.0	124.8	P
Cell 13#	56.1	4.14	89.0	117.3	P
Cell 14#	56.1	4.15	90.0	109.6	P
Cell 15#	56.1	4.14	93.0	121.0	P
<b>Supplementary information:</b>					
- No fire or explosion					

7.3.2	TABLE: External short-circuit (battery)					N/A
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise $\Delta T$ , °C	Component single fault condition	Results
<b>Supplementary information:</b>						
- No fire or explosion						

7.3.5	TABLE: Crush (cells)				P
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
INR18650H 2000mAh					
<b>Samples charged at charging temperature upper limit (55°C)</b>					
Cell 29#	4.20	4.11	13.0	P	
Cell 30#	4.21	4.12	13.0	P	
Cell 31#	4.20	4.13	13.0	P	
Cell 32#	4.19	4.15	13.0	P	
Cell 33#	4.20	4.14	13.0	P	
<b>Samples charged at charging temperature lower limit (-15°C)</b>					
Cell 34#	4.09	4.00	13.0	P	
Cell 35#	4.08	4.01	13.0	P	

Cell 36#	4.10	3.81	13.0	P
Cell 37#	4.10	3.86	13.0	P
Cell 38#	4.09	3.99	13.0	P
INR18650H 2200mAh				
<b>Samples charged at charging temperature upper limit (45°C)</b>				
Cell 29#	4.19	4.17	13.0	P
Cell 30#	4.18	4.08	13.0	P
Cell 31#	4.19	4.09	13.0	P
Cell 32#	4.19	4.03	13.0	P
Cell 33#	4.19	4.00	13.0	P
<b>Samples charged at charging temperature lower limit (-5°C)</b>				
Cell 34#	4.14	4.11	13.0	P
Cell 35#	4.15	4.10	13.0	P
Cell 36#	4.14	4.07	13.0	P
Cell 37#	4.13	4.08	13.0	P
Cell 38#	4.14	4.07	13.0	P
<b>Supplementary information:</b>				
- No fire or explosion				

<b>7.3.6</b>	<b>TABLE: Over-charging of battery</b>				<b>N/A</b>
Constant charging current (A) .....					—
Supply voltage (Vdc) .....					—
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
				P	
				P	
				P	
				P	
				P	
<b>Supplementary information:</b>					
- No fire or explosion					

<b>7.3.7</b>	<b>TABLE: Forced discharge (cells)</b>				<b>P</b>
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge $I_r$ (A)	Lower limit discharge voltage (Vdc)	Results	
INR18650H 2000mAh					
Cell 39#	3.14	2.0	-4.25	P	
Cell 40#	3.12	2.0	-4.25	P	

Cell 41#	3.15	2.0	-4.25	P
Cell 42#	3.14	2.0	-4.25	P
Cell 43#	3.13	2.0	-4.25	P
INR18650H 2200mAh				
Cell 39#	3.09	2.2	-4.25	P
Cell 40#	3.11	2.2	-4.25	P
Cell 41#	3.09	2.2	-4.25	P
Cell 42#	3.13	2.2	-4.25	P
Cell 43#	3.15	2.2	-4.25	P
<b>Supplementary information:</b>				
- No fire or explosion				

7.3.8.1	TABLE: Vibration					N/A
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
<b>Supplementary information:</b>						
- No fire or explosion						
- No rupture						
- No leakage						
- No venting						

7.3.8.2	TABLE: Mechanical shock					N/A
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
<b>Supplementary information:</b>						
- No fire or explosion						
- No rupture						
- No leakage						
- No venting						

7.3.9	TABLE: Forced internal short circuit (cells)					P
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location <sup>1)</sup>	Maximum applied pressure (N)	Results	
INR18650H 2000mAh						
<b>Samples charged at charging temperature upper limit (55°C)</b>						



Cell 44#	55	4.18	1	800	P
Cell 45#	55	4.19	1	800	P
Cell 46#	55	4.18	1	800	P
Cell 47#	55	4.19	2	800	P
Cell 48#	55	4.19	2	800	P
<b>Samples charged at charging temperature lower limit (-15°C)</b>					
Cell 49#	-15	4.07	1	800	P
Cell 50#	-15	4.08	1	800	P
Cell 51#	-15	4.08	1	800	P
Cell 52#	-15	4.07	2	800	P
Cell 53#	-15	4.08	2	800	P
INR18650H 2200mAh					
<b>Samples charged at charging temperature upper limit (45°C)</b>					
Cell 44#	45	4.19	1	800	P
Cell 45#	45	4.19	1	800	P
Cell 46#	45	4.19	1	800	P
Cell 47#	45	4.19	2	800	P
Cell 48#	45	4.19	2	800	P
<b>Samples charged at charging temperature lower limit (-5°C)</b>					
Cell 49#	-5	4.13	1	800	P
Cell 50#	-5	4.14	1	800	P
Cell 51#	-5	4.14	1	800	P
Cell 52#	-5	4.14	2	800	P
Cell 53#	-5	4.13	2	800	P
<b>Supplementary information:</b>					
1) Identify one of the following:					
1: Nickel particle inserted between positive and negative (active material) coated area.					
2: Nickel particle inserted between positive aluminium foil and negative active material coated area.					
- No fire					

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results <sup>1)</sup>	
<b>Supplementary information:</b>					
1) Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables					

-- End of Report --

Product: Li-ion Cell

Type Designation: INR18650H 2000mAh, INR18650H 2200mAh

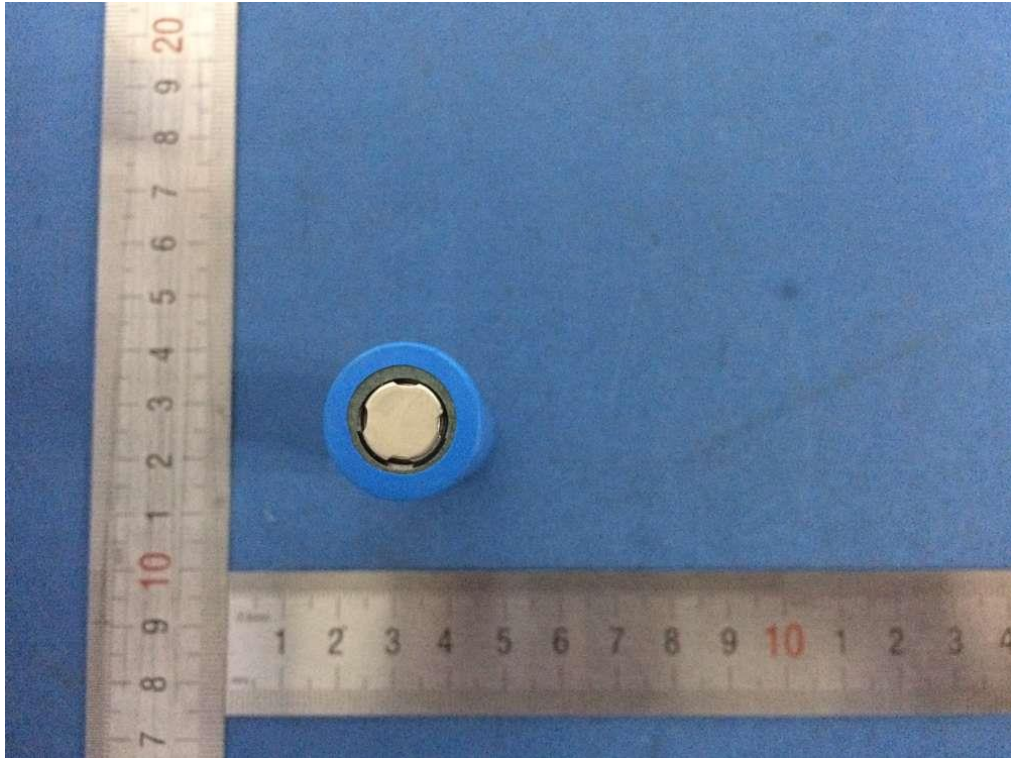


Figure 1 Terminal view of cell (INR18650H 2000mAh)

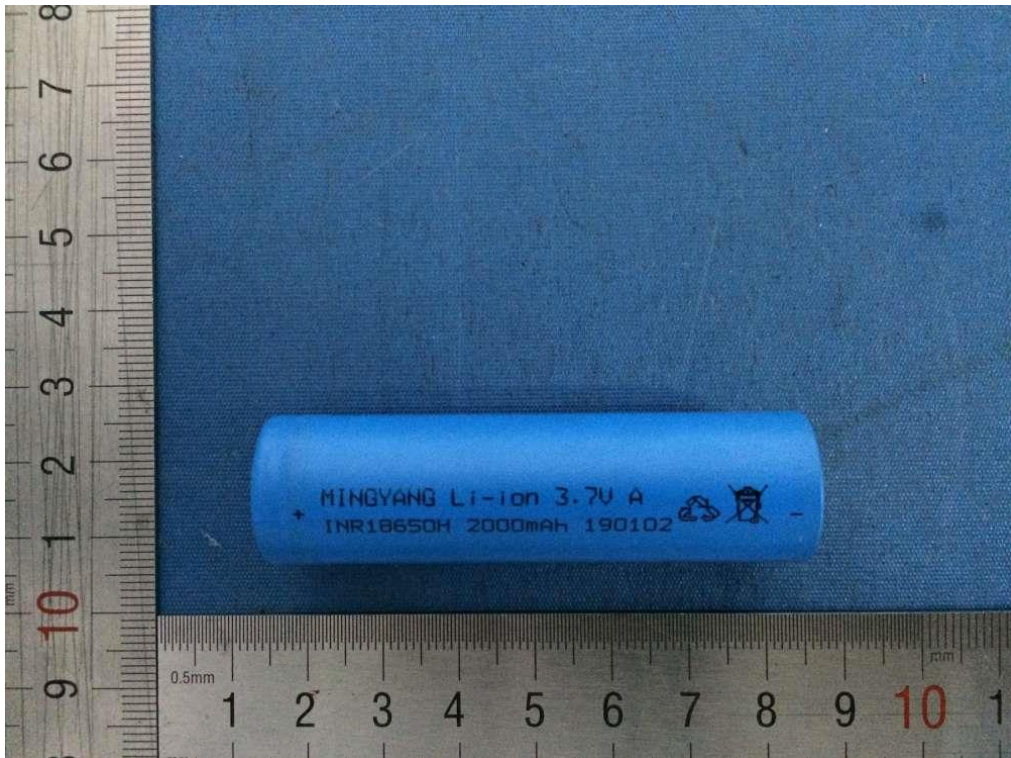


Figure 2 Side view of cell (INR18650H 2000mAh)

Product: Li-ion Cell

Type Designation: INR18650H 2000mAh, INR18650H 2200mAh

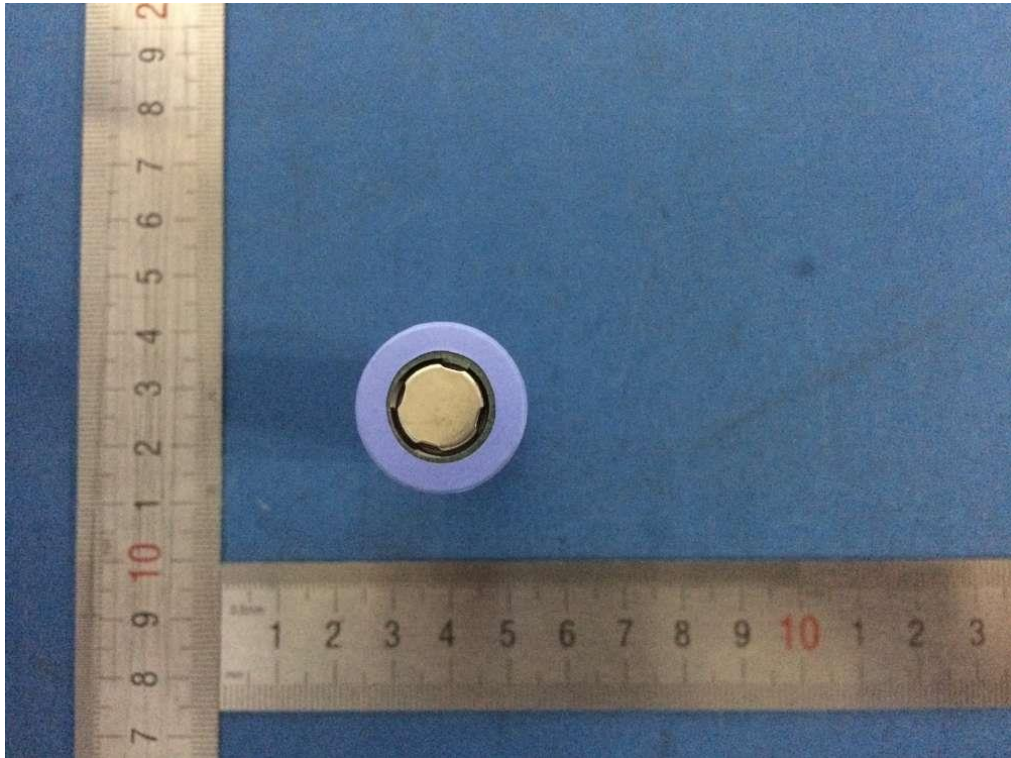


Figure 3 Terminal view of cell (INR18650H 2200mAh)

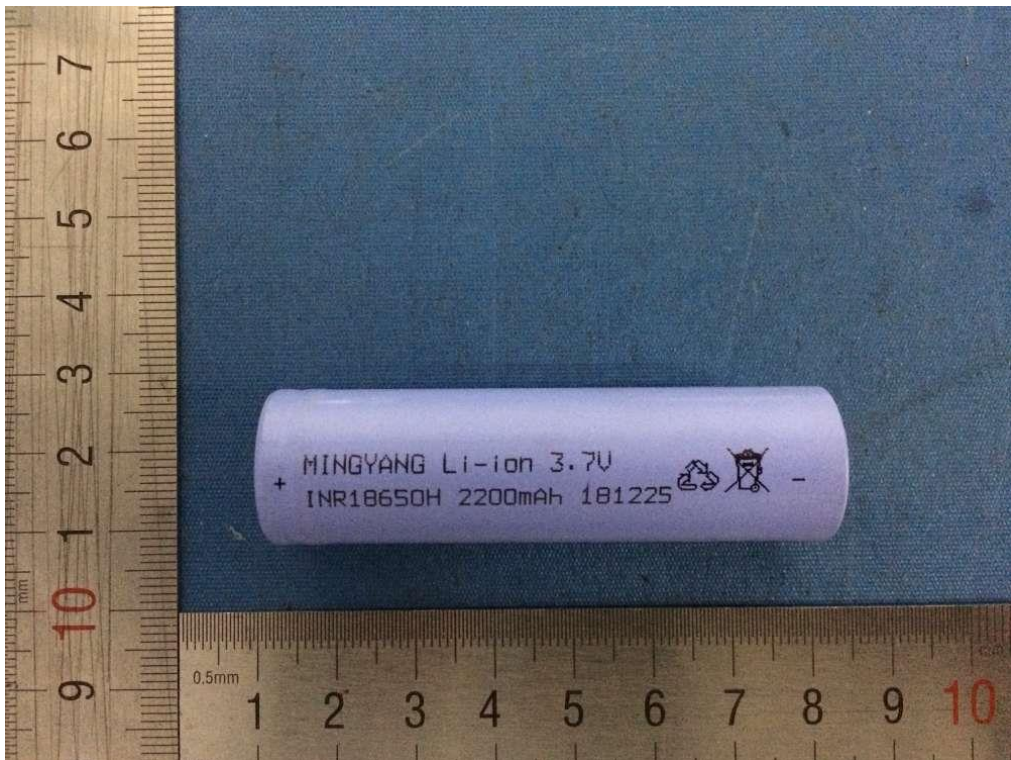


Figure 4 Side view of cell (INR18650H 2200mAh)